



AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

Ref. UA3280 Family : 42

Rev. 00

Date : 22 June 2021

Page 1/1

ALUMINIUM BRONZE DOUBLE NIPPLE THREADED

Ref. UA3280.Ø

SERIES :

- UA3280

For material compatibility, contact us

CARACTERISTICS :

- PN40 (Nominal Pressure)
- ENDS : Male BSP threaded
- MATERIAL : ALUMINIUM BRONZE CW307G

MAXIMUM CONDITIONS OF USE :



- 40 bar of -10°C to 200°C



Subject to modifications

APPLICATIONS :

- Water-based fluids
- Water
- Seawater

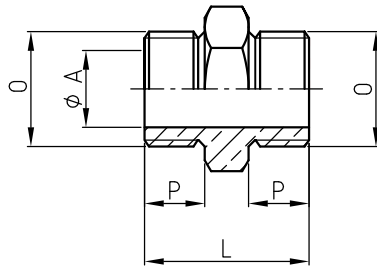

DIMENSIONS

Reference	DN	ØA (mm)	H (mm)	L (mm)	O	P (mm)	Weight (Kg)
UA3280.08	8	6	19	24	G 1/4	9	0.032
UA3280.10	10 (12)	9	24	26	G 3/8	9	0.055
UA3280.15	15	14	26	30	G 1/2	11	0.066
UA3280.20	20	18	36	38	G 3/4	12	0.168
UA3280.25	25	24	46	46	G 1	14	0.318
UA3280.32	32	30	50	50	G 1 1/4	16	0.416

REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)

Ref. instruction of assembling :

Ref. instruction of operation :

**Mounting & assembly guides are available
on our website.**

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.