



# AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE  
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28  
Website : www.autexier.fr

Ref. UA3280 Family : 42

Rev. 00

Date : 22 June 2021

Page 1/1

## ALUMINIUM BRONZE DOUBLE NIPPLE THREADED Ref. UA3280.ØØ

### SERIES :

- UA3280


*For material compatibility, contact us*

### CARACTERISTICS :

- PN40 (Nominal Pressure)

- ENDS : Male BSP threaded

- MATERIAL : ALUMINIUM BRONZE CW307G



### MAXIMUM CONDITIONS OF USE :

- 40 bar of -10°C to 200°C



*Subject to modifications*

### APPLICATIONS :

- Water-based fluids

- Water

- Seawater

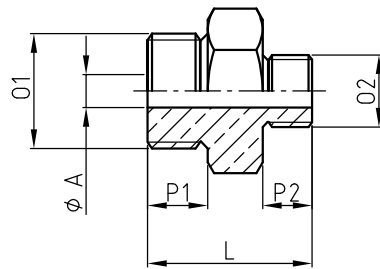

### DIMENSIONS

Reference	DN1	DN2	ØA (mm)	H (mm)	L (mm)	O1	O2	P1 (mm)	P2 (mm)	Weight (Kg)
UA3280.1008	10 (12)	08	6	24	30	G 3/8	G 1/4	11	9	0.068
UA3280.1508	15	08	6	26	30	G 1/2	G 1/4	11	9	0.087
UA3280.1510	15	10 (12)	6	26	30	G 1/2	G 3/8	11	9	0.094
UA3280.2008	20	08	6	36	39	G 3/4	G 1/4	11	9	0.242
UA3280.2015	20	15	14	36	39	G 3/4	G 1/2	11	9	0.214

### REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272

- Testing & checking : NF EN 12266-1/-2 (bench test)

Ref. instruction of assembling :

Ref. instruction of operation :

**Mounting & assembly guides are available  
on our website.**

*These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.*