



# AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE  
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28  
Website : www.autexier.fr

Ref. UA3281 Family : 42

Rev. 00

Date : 22 June 2021

Page 1/1

## ALUMINIUM BRONZE DOUBLE NIPPLE THREADED

### Ref. UA3281.Ø

#### SERIES :

- UA3281

*For material compatibility, contact us*

#### CARACTERISTICS :

- PN40 (Nominal Pressure)
- ENDS : Male BSP threaded
- MATERIAL : ALUMINIUM BRONZE CW307G / CC333G

#### MAXIMUM CONDITIONS OF USE :



- 40 bar of -10°C to 200°C



*Subject to modifications*

#### APPLICATIONS :

- Water-based fluids
- Water
- Seawater

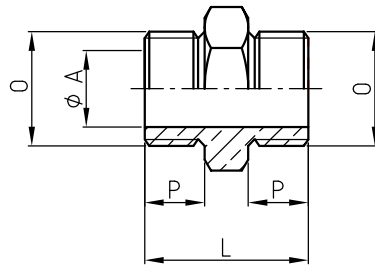

#### DIMENSIONS

Reference	DN	ØA (mm)	H (mm)	L (mm)	O	P (mm)	Weight (Kg)
UA3281.08	8	6	19	26	G 1/4	9	0.037
UA3281.10	10 (12)	10	24	28	G 3/8	9	0.059
UA3281.15	15	14	30	35	G 1/2	11	0.107
UA3281.20	20	18	36	39	G 3/4	12	0.175
UA3281.25	25	24	41	45	G 1	14	0.249
UA3281.32	32	30	50	50	G 1 1/4	16	0.416
UA3281.40	40	38	55	60	G 1 1/2	18	0.518
UA3281.50	50	45	70	65	G 2	20	1.002

#### REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)

Ref. instruction of assembling :

Ref. instruction of operation :

**Mounting & assembly guides are available  
on our website.**

*These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.*