REF - 190 / 290 / 390

SOUPAPE DE SURETÉ À RESSORT - APPLICATION CHAUFFAGE - PN40

SPRINGLOADED SAFETY VALVE - HEATING APPLICATION - PN40

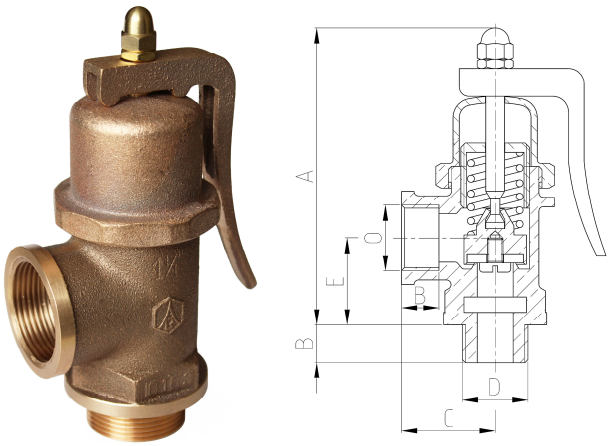

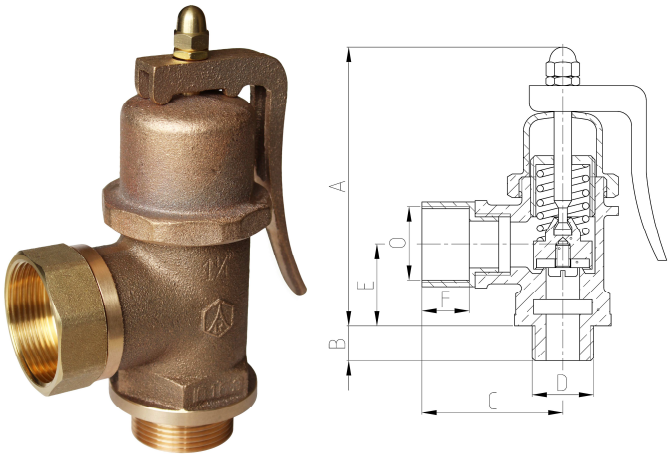

190 / 290 / 390				
Ø-DN	15	20	25	32
A	88	100	120	149
C	30	35	40	45
H	28	35	39	43
O	1/2"	3/4"	1"	1"1/4
Kg	0,4	0,6	1	1,6

190 / 290 / 390. Ø. Ø				
Ø-DN	15/20	20/25	25/32	32/40
A	88	100	120	149
C	44	53	59	64
H	28	35	39	43
O	3/4"	1"	1"1/4	1"1/2
Kg	0,46	0,7	1,2	1,75

CONCEPTION

Bronze - CuSn5ZnPb / ASTM B62

Clapet FPM : Réf. 190 -15°C / +200°C
Clapet PTFE : Réf. 390 -50°C / +225°C
Clapet Métal : Réf. 290 -50°C / +225°C
Clapet Silicone : Réf. 190BP -50°C / +200°C
Entrée Mâle / Sortie Femelle
Dispositif de relevage
Orifices décalés 190 / 290 / 390.Ø.Ø

PMS/MSP : 40 Bar

FPM Disc : Ref. 190 -15°C / +200°C
PTFE Disc : Ref. 390 -50°C / +225°C
Metal Disc : Ref. 290 -50°C / +225°C
Silicone Disc : Ref. 190BP -50°C / +200°C
Male inlet / Female outlet
With lifting test handlever
Different size in outlet 190 / 290 / 390.Ø.Ø

APPLICATIONS

Eau chaude & Fluides Industriels
Fluides aqueux
Vapeur basse pression (8 Bar)
Gaz neutres (air comprimé,...)

Hot water & Industrial fluids
Water-based fluids
Low pressure steam (8 Bar)
Neutral gases (air compressed, ...)

MADE IN FRANCE

OPTIONS

Nickelage / Chromage
Clapet dégraissé

Nickel / Chrome plating
Degreased disc / seat