


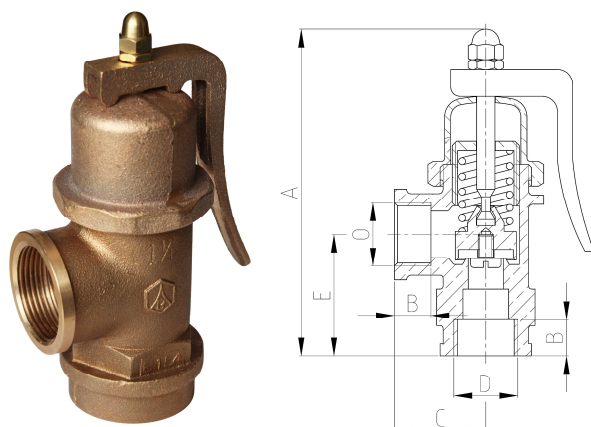

182 / 282				
Ø-DN	15	20	25	32
A	100	114	136	167
C	30	35	40	45
E	40	49	55	61
O	1/2"	3/4"	1"	1"1/4
Kg	0,38	0,73	1,35	1,71

CONCEPTION

Bronze - CuSn5ZnPb / ASTM B62

Clapet FPM : Réf. 182 -15°C / +200°C

Clapet PTFE : Réf. 282 -50°C / +225°C

Clapet Métal : Réf. 382 -50°C / +225°C

Clapet Silicone : Réf. 182BP -50°C / +200°C

Entrée / Sortie Femelle

Emcombrement limité / Avec système de relevage

Ressort isolé du fluide

Orifices décalés

APPLICATIONS

Eau chaude & Fluides Industriels

Fluides aqueux

Vapeur basse pression (8 Bar)


Gaz neutres (air comprimé,...)

OPTIONS

Nickel / Chromage

Connexion à brides ou NPT

Clapet dégraissé

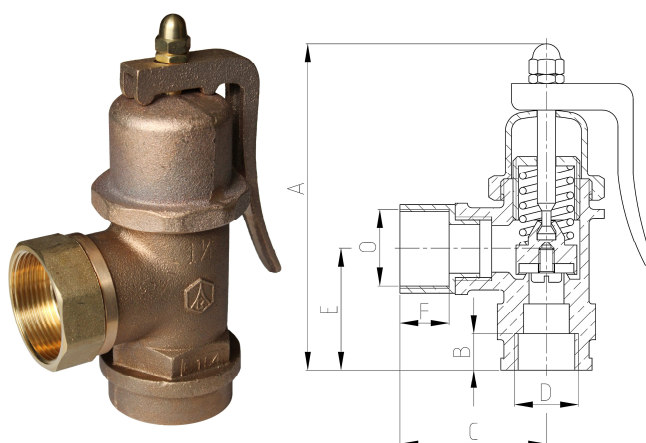

182 / 282ø.ø				
Ø-DN	15/20	20/25	25/32	32/40
A	100	114	136	167
C	44	53	59	64
E	40	49	55	61
O	3/4"	1"	1"1/4	1"1/2
Kg	0,42	0,76	1,45	1,85

PMS/MSP : 40 Bar

FPM Disc : Ref. 182 -15°C / +200°C

PTFE Disc : Ref. 282 -50°C / +225°C

Metal Disc : Ref. 382 -50°C / +225°C

Silicone Disc : Ref. 182BP -50°C / +200°C

Female Inlet / Outlet

Reduced housing / With handlever

Spring protected from fluid

Different size in outlet

Hot water & Industrial fluids

Water-based fluids

Low pressure steam (8 Bar)

Neutral gases (air compressed,...)

Nickel / Chrome plating

Flange or NPT connection

Degreased disc / seat