

183 / 283				
Ø-DN	15	20	25	32
A	86	100	117	140
C	30	35	40	45
E	40	49	55	61
Kg	0,35	0,6	1,1	1,55

CONCEPTION

Bronze - CuSn5ZnPb / ASTM B62

Clapet FPM : Réf. 183 -15°C / +200°C

Clapet PTFE : Réf. 283 -50°C / +225°C

Clapet Silicone : Réf. 183BP -50°C / +200°C

Entrée / Sortie Femelle

Emcombrement limité

Ressort isolé du fluide

Orifices décalés

APPLICATIONS

Eau chaude & Fluides Industriels

Fluides aqueux

Vapeur basse pression (8 Bar)


Gaz neutres (air comprimé,...)

OPTIONS

Nickel / Chromage

Connexion à brides ou NPT

Clapet dégraissé

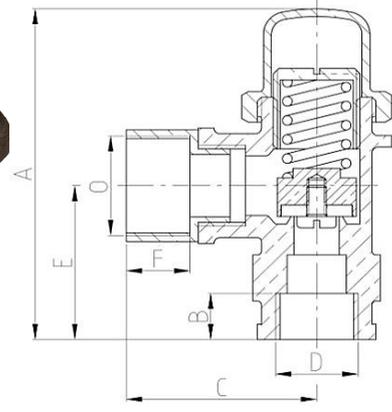

183 / 283				
Ø-DN	15/20	20/25	25/32	32/40
A	86	100	117	140
C	44	53	59	64
E	40	49	55	61
Kg	0,4	0,65	1,3	1,7

PMS/MSP : 40 Bar

FPM Disc : Ref. 183 -15°C / +200°C

PTFE Disc : Ref. 283 -50°C / + 225°C

Silicone Disc : Ref. 183BP -50°C / +200°C

Female Inlet / Outlet

Reduced housing

Spring protected from fluid

Different size in outlet

Hot water & Industrial fluids

Water-based fluids

Low pressure steam (8 Bar)

Neutral gases (air compressed,...)

Nickel / Chrome plating

Flanges or NPT connection

Degreased disc / seat