REF - 381 / 281 / 181 / 481 / 481T / 481M

SOUPAPE DE SURETÉ À RESSORT - FLUIDES INDUSTRIELS - PN40

SPRINGLOADED SAFETY VALVE - INDUSTRIAL FLUIDS - PN40

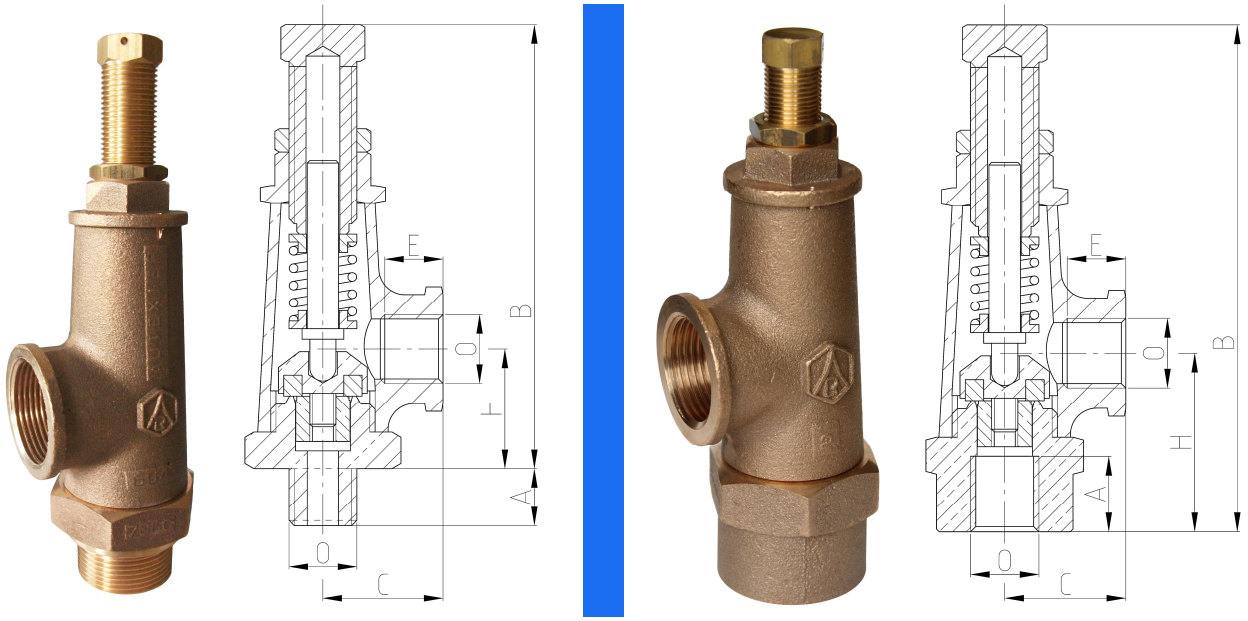

381 / 281 / 181. Ø & 481 / 481T / 481M / 381BP											PN35
	Ø-DN	8	12	15	20	25	32	40	50	65	80
181/281/381	B	61	61	90	107	122	145	172	209	231	275
481/481M/481T	B	72	72	105	126	143	167	195	236	263	309
	C	23	23	28	34	36	42	50	55	67	80
181/281/381	H	23	23	37	47	56	60	68	81	93	109
481/481M/481T	H	35	35	70	87	101	107	118	141	160	181
	0	1/4"	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"
181/281/381	Kg	0,2	0,2	0,37	0,68	1,02	1,43	1,95	3,15	5,8	8,05
481/481T/481M	Kg	0,21	0,2	0,45	0,8	1,3	1,72	2,4	3,63	6,45	9,4

CONCEPTION

Bronze -CuSn5ZnPb / ASTM B62

Clapet FPM : Réf. 381 & 481 -15°C / +200°C
Clapet PTFE : Réf. 281 & 481T -50°C / +225°C
Clapet Métal : Réf. 181 & 481M -50°C / +225°C
Clapet Silicone Réf. 381BP / 481BP -50°C / +200°C
Entrée Mâle / Sortie Femelle Réf. 381 / 181 / 281
Entrée / Sortie Femelle Réf. 481 / 481T / 481M

PMS/MSP : 40 Bar

FPM Disc : Ref. 381 & 481 -15°C / +200°C
PTFE Disc : Ref. 281 & 481T -50°C / +225°C
Metal Disc : Ref. 181 & 481M -50°C / +225°C
Silicone Disc : Ref. 381BP / 481BP -50°C / +200°C
Male inlet / Female outlet Ref. 381 / 181 / 281
Female inlet / outlet Ref. 481 / 481T / 481M

APPLICATIONS

Eau chaude & Fluides Industriels
Fluides aqueux
Vapeur basse pression (8 bar)
Gaz neutres (air comprimé,…)

Hot water & Industrial fluids
Water-based fluids
Low pressure steam (8 bar)
Neutral gases (compressed air,….)

MADE IN FRANCE

OPTIONS

Connexion NPT
Connexion à bride
Clapet dégraissé

NPT connection
Flange connection
Degreased disc / seat