
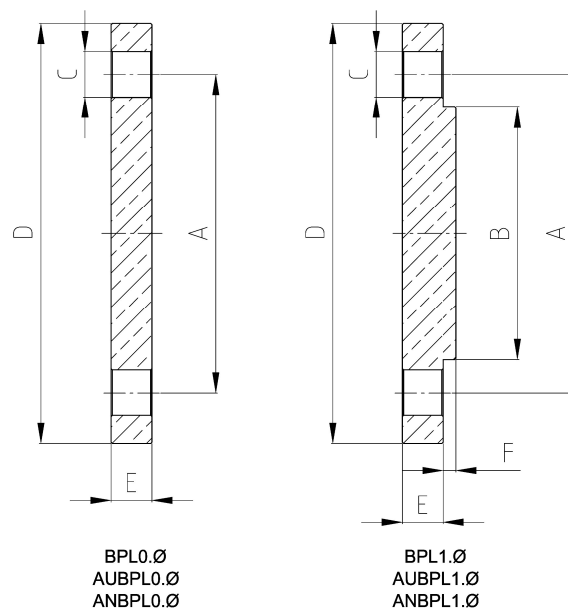


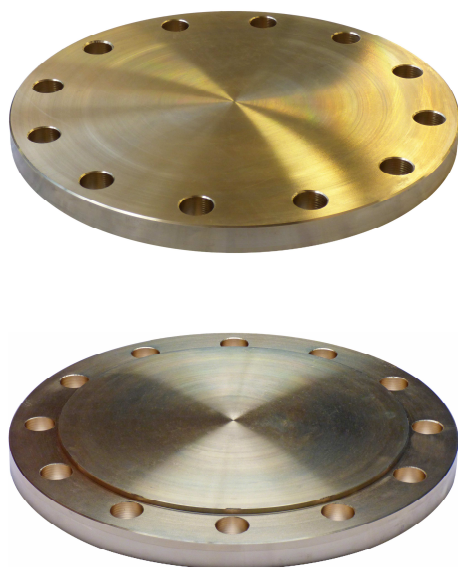

DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300
A	65	75	85	100	110	125	145	160	180	210	240	295	355	410
C	14	14	14	18	18	18	18	18	18	18	22	22	26	26
D	95	105	115	140	150	165	185	200	220	250	285	340	405	460
E	14	14	16	16	16	16	16	18	18	18	18	22	24	28
F	5	5	5	5	5	5	5	5	5	5	5	5	5	5

CONCEPTION

Bronze - CuSn5ZnPb / ASTM B62

Bride pleine face plate Réf. BPL0.Ø

Bride pleine face surélevée Réf. BPL1.Ø

Cupro-Aluminium - CuAl9Ni3Fe2

Bride pleine face plate Réf. AUBPL0.Ø

Bride Pleine face surélevée Réf. AUBPL1.Ø

Cupro-Nickel - CuNi10Fe1Mn1

Bride pleine face plate Réf. ANBPL0.Ø

Bride pleine face surélevée Réf. ANBPL1.Ø

PMS/MSP : 20 Bar

TMS/MST : -50°C / + 250°C

Bronze - CuSn5ZnPb / ASTM B62

Blind flange flate face Ref. BPL0.Ø

Blind flange raised face Ref. BPL1.Ø

Aluminium Bronze - CuAl9Ni3Fe2

Blind flange flate face Ref. AUBPL0.Ø

Blind flange raised face Ref. AUBPL1.Ø

Copper-Nickel - CuNi10Fe1Mn1

Blind flange flate face Ref. ANBPL0.Ø

Blind flange raised face Ref. ANBPL1.Ø

APPLICATIONS

Fluides aqueux

Vapeur (8 Bar)

Eau de mer



Water-based fluids

Steam (8 Bar)

Seawater

OPTIONS

Perçage spécial

Special drilling