


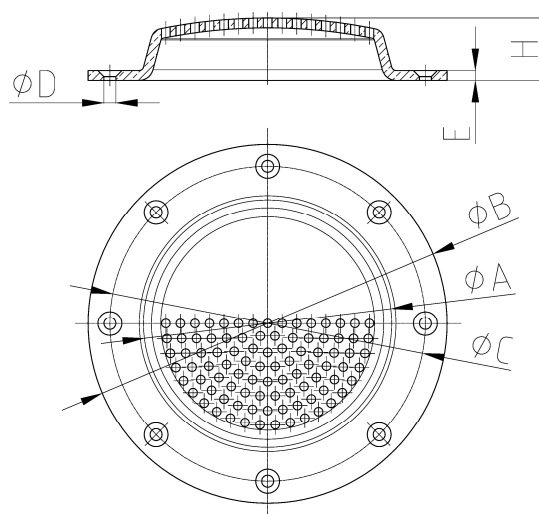

	U63.001	U63.002	U63.003	U63.004	U63.005	U63.008
Surface percée <i>Drilled surface area</i>	50%	100%	50%	100%	100%	100%
A	85	85	115	115	180	240
B	125	125	165	165	235	285
C	110	110	145	145	208	265
D	5,5	5,5	5,5	5,5	5,5	5,5
E	4	4	4,5	4,5	5	5,5
H	21	21	28,5	28,5	43	50,5
Kg	0,520	0,510	0,930	0,920	1,900	2,850

CONCEPTION

Bronze - CuSn5ZnPb / ASTM B62

Réf. U63

Cupro-Aluminium - CuAl9Ni3Fe2

Réf. UA63

Cupro-Nickel - CuNi10Fe1Mn1

Réf. UN63

Bronze - CuSn5ZnPb / ASTM B62

Ref. U63

Aluminium Bronze - CuAl9Ni3Fe2

Ref. UA63

Copper-Nickel - CuNi10Fe1Mn1

Ref. UN63

APPLICATIONS

Eau

Eau de mer

Fluides aqueux

Hydrocarbures

Water

Seawater

Water-based fluids

Oil & Gas

OPTIONS

Perçage spécial



Special drilling