



AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
 Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
 Website : www.autexier.fr

Ref. A76 Family : 49

Rev. 00

Date : 21 Dec. 2022

Page 1/1

BRONZE 3 WAY BALL VALVE WITH FLANGES

Ref. A76T65

SERIES :

- A76T
- Three-way T

For material compatibility, contact us

CARACTERISTICS :

- PN30 (Nominal Pressure)
- ENDS : ISO PN16 Flanges
- MATERIAL : BRONZE CC491K

MAXIMUM CONDITIONS OF USE :

- 30 bar at 200°C


APPLICATIONS :

- Water-based fluids
- Oil & gas

OPTIONS :

- Special drilling
- Lockable handle
- Monel stem and ball
- Fourth way

Specific dimensions, contact us

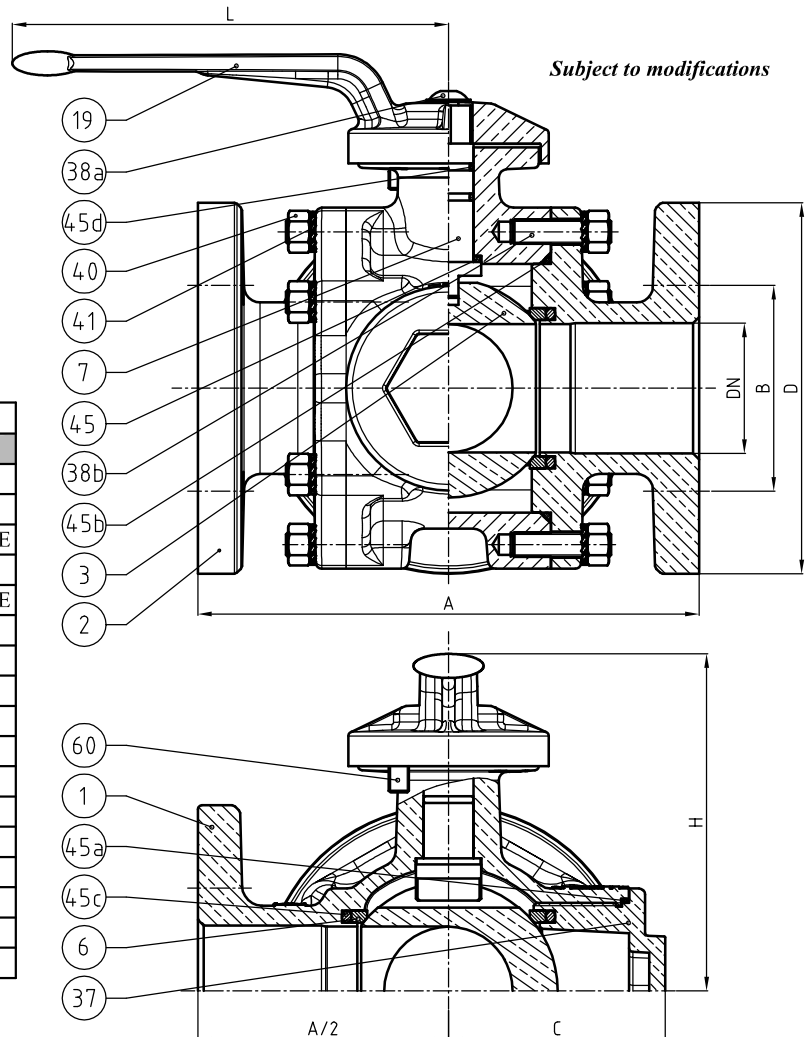

NOMENCLATURE			
Rep	Qty	Designation	Material
1	1	BODY	BRONZE
2	2	COVER	BRONZE
3	1	BALL	ALUMINIUM BRONZE
6	2	SEAT	PTFE
7	1	STEM	ALUMINIUM BRONZE
19	1	HANDLE	BRONZE
37	1	PLUG	BRONZE
38a	1	SCREW	STAINLESS STEEL
38b	12	SCREW	STAINLESS STEEL
40	12	NUT	STAINLESS STEEL
41	12	WASHER	STAINLESS STEEL
45	1	GASKET	PTFE
45a	1	O-RING	FPM
45b	2	O-RING	FPM
45c	4	O-RING	FPM
45d	2	O-RING	FPM
60	1	SPRING PLUNGERS	STAINLESS STEEL

REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Flanges : NF EN 1092-3

Ref. instruction of assembling : 0904DA157E

Ref. instruction of operation : 0904DA158E

Mounting & assembly guides are available on our website.

DIMENSIONS	
DN	65
A (mm)	250
B (mm)	145
C (mm)	108
D (mm)	185
H (mm)	168
L (mm)	218
Weight (Kg)	34.430

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.