

AUTEXIER

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE Phone: +33 (0)3 23 52 02 86 Fax: +33 (0)3 23 39 52 28 Website: www.autexier.fr

Ref. AUR3 Family: 40

Rev. 03

Date: 15 Dec. 2021

Page 1/1

SYMMETRICAL FITTING WITH ALUMINIUM-BRONZE NATO FLANGE Ref. AUR3V

SERIES:

- AUR3

For material compatibility, contact us

CARACTERISTICS:

- PN16 (Nominal Pressure)
- ENDS: NATO Flange / Symmetrical fitting with lock
- MATERIAL : ALUMINIUM BRONZE CC333G

MAXIMUM CONDITIONS OF USE:

- 16 bar of -10°C to 100°C

APPLICATIONS:

- Water-based fluids
- Steam (8 bar)
- Seawater

DIMENSIONS				
REF.	AUR3.65V	AUR3.66V		
NATO	6"1/2	7"1/2		
DN	65	65		
A (mm)	165	190.5		
B (mm)	133	159		
C (mm)	108	133.5		
L (mm)	142	142		

DIMENSIONS			
AUR3.65V	AUR3.66V		
6"1/2	7"1/2		
65	65		
165	190.5		
133	159		
108	133.5		
142	142		
	AUR3.65V 6"1/2 65 165 133 108		

NOMENCLATURE			
Rep	Qty	Designation	Material
37	1	PLUG	BRONZE / BRASS
45	1	BLACK GASKET	NBR
54	1	FEMALE THEADED FLANGE	ALUMINIUM BRONZE
68	1	CHAIN	STAINLESS STELL
69	1	MALE FITTING	BRONZE

REFERENCES NORMS:


- Material: NF EN 1982 NF EN 12163 NF EN 12164 NF EN 10272
- Testing & checking: NF EN 12266-1/-2 (bench test)

Ref. instruction of assembling: -Ref. instruction of operation : -

Mounting & assembly guides are available on our website.





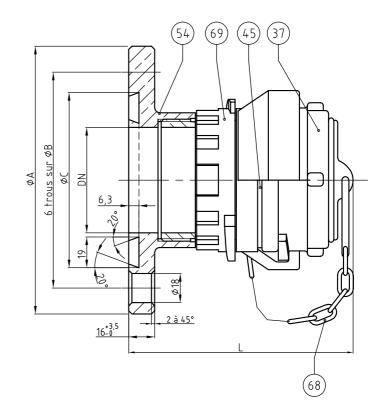

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment choosen and the real conditions of use.