



AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

Ref. 118 Family : 21

Rev. 06

Date : 23 May 2025

Page 1/1

BRONZE FLANGED STRAINER Ref. 118.Ø

SERIES :

- 118

For material compatibility, contact us

CARACTERISTICS :

- PN30 (Nominal Pressure)
- ENDS : ISO PN16 flanges
- MATERIAL : BRONZE CC491K

MAXIMUM CONDITIONS OF USE :

- 30 bar at of -15°C to 200°C

APPLICATIONS :

- Water-based fluids
- Seawater

OPTIONS :

- Special drilling
- Strainer material
- Filtration on demand
- Tap drain valve
- NPT or metric thread drain plug


Specific dimensions, contact us

DIMENSIONS								
DN	A (mm)	C (mm)	D (mm)	n	E (mm)	G	H (mm)	Ref.
20	150	75	105	4	14	-	85*	-
25	160	85	115	4	14	-	110*	-
32	180	100	140	4	19	-	115*	-
40	200	110	150	4	19	-	130*	-
50	230	125	165	4	19	G3/8"	242	118.50
65	290	145	185	4	19	-	185*	-
80	310	160	200	8	19	G3/4"	215	118.80
100	350	180	220	8	19	G3/4"	242	118.100
125	400	210	250	8	19	-	250*	-
150	480	240	285	8	23	G3/4"	348	118.150

**Under reserve*



Subject to modifications

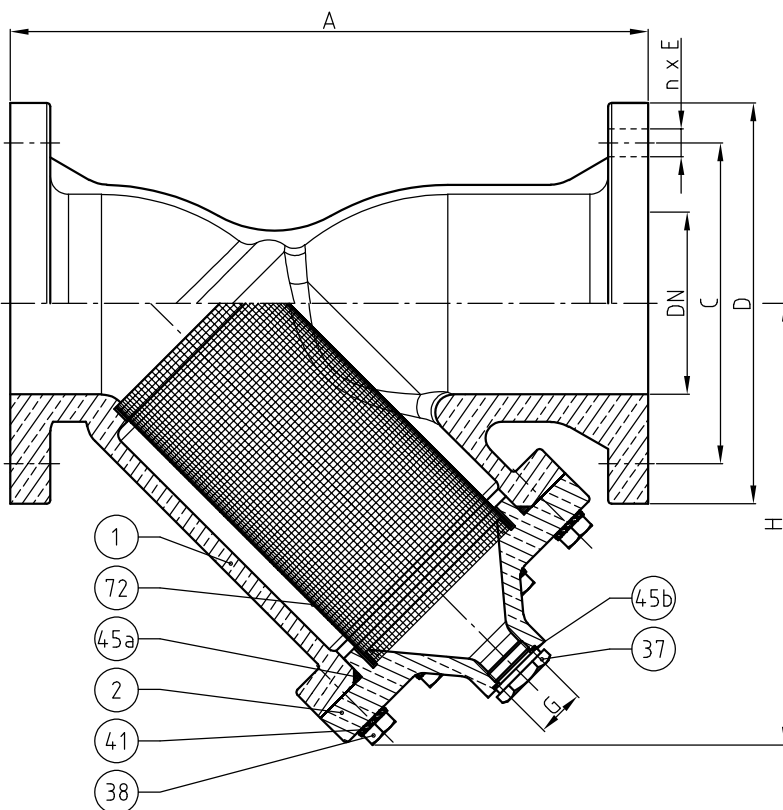

REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Face to face : NF EN 558 - Series 1
- Flanges : NF EN 1092-3

Ref. instruction of assembling : 0904DA101E

Ref. instruction of operation : 0904DA100E

**Mounting & assembly guides are available
on our website.**

NOMENCLATURE

Rep	Qty	Designation	Material
1	1	BODY	BRONZE
2	1	BONNET	BRONZE
37	1	PLUG	ALUMINIUM BRONZE
38	8	SCREW	A4-70 STAINLESS STEEL
41	8	DEC WASHER	A4 STAINLESS STEEL
45a	1	O-RING	FPM
45b	1	GASKET	PTFE
72	1	SIEVE	STAINLESS STEEL

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.