



AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

Ref. AU593 Family : 09

Rev. 03

Date : 08 Aug. 2025

Page 1/1

ALUMINIUM-BRONZE DOUBLE WEDGE GATE VALVE WITH FLANGES Ref. AU593.300

SERIES :

- AU593
- Outside rising stem

For material compatibility, contact us

CARACTERISTICS :

- PN10 (Nominal Pressure)
- ENDS : Flanges ISO PN10
- MATERIAL : ALUMINIUM BRONZE CC333G

MAXIMUM CONDITIONS OF USE :

- 10 bar of -10°C to 200°C

APPLICATIONS :

- Seawater
- Water-based fluids
- Steam (8 bar)



Subject to modifications

NOMENCLATURE

Rep	Qty	Designation	Material
1	1	BODY	ALUMINIUM BRONZE
2	1	BONNET	ALUMINIUM BRONZE
3	1	DOUBLE WEDGE DISC	ALUMINIUM BRONZE
7	1	STEM	ALUMINIUM BRONZE
8	1	HANDWHEEL	ALUMINIUM BRONZE
10	1	STEM NUT	ALUMINIUM BRONZE
11	1	WEDGE DISC NUT	ALUMINIUM BRONZE
12	1	PACKING	PTFE
17	1	PACKING GLAND FLANGE	ALUMINIUM BRONZE
38a	16	SCREW	STAINLESS STEEL A4-70
38b	2	SCREW	STAINLESS STEEL A4-70
40a	2	NUT	STAINLESS STEEL A4-70
40b	1	NUT	ALUMINIUM BRONZE
41a	16	WASHER	STAINLESS STEEL A4
41b	2	WASHER	STAINLESS STEEL A4
41b	1	WASHER	ALUMINIUM BRONZE
45	1	O-RING	FPM
61	1	PIN	ALUMINIUM BRONZE


REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Face to face : NF EN 558 - Series 29
- Flanges : NF EN 1092-3

Ref. instruction of assembling : 0904DA165E

Ref. instruction of operation : 0904DA166E

**Mounting & assembly guides are available
on our website.**

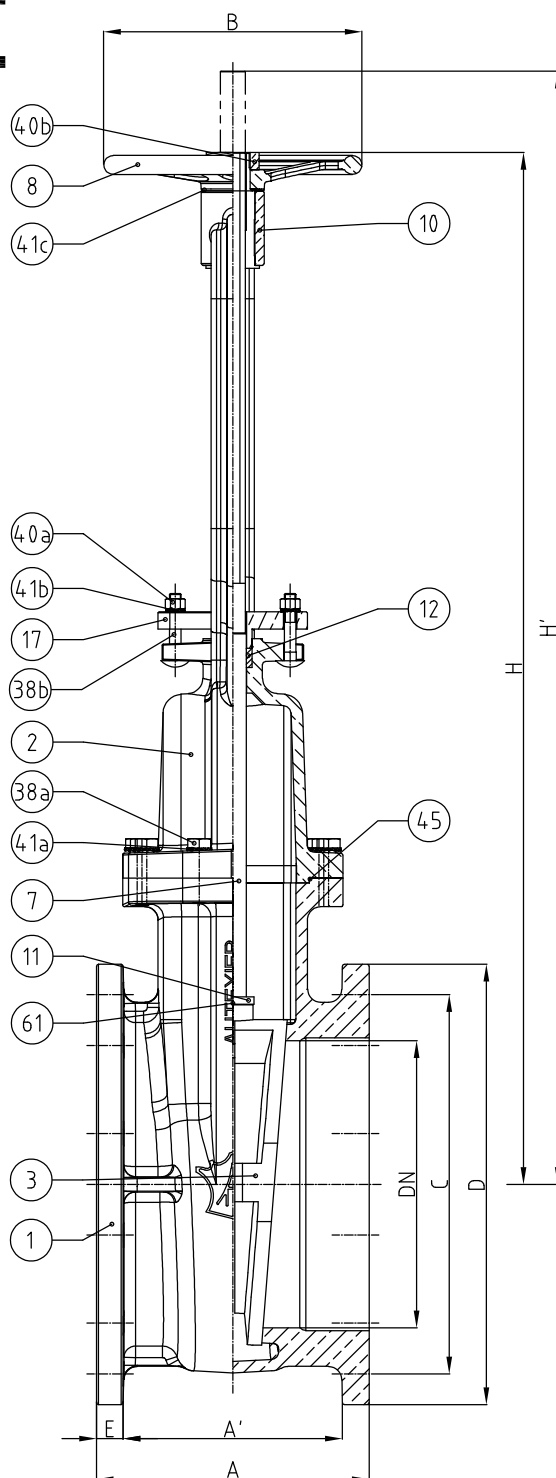

DIMENSIONS

DN	A (mm)	A' (mm)	B (mm)	C (mm)	D (mm)	E (mm)	H (mm)	H' (mm)	Weight (Kg)
300	285	230	280	400	445	28	1080	1395	175.00

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.