



# AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE  
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28  
Website : [www.autexier.fr](http://www.autexier.fr)

Ref. AUBX Family : 40

Rev. 03

Date : 04 Sept. 2025

Page 1/1

## ALUMINIUM BRONZE FEMALE THREADED FLANGE

Ref. AUBXØBØ

### SERIES :

- AUBX
  - Standard drilling : ISO PN 10/16
- For material compatibility, contact us*

### CARACTERISTICS :


- PN20 (Nominal Pressure)
- ENDS : NPT female thread
- MATERIAL : ALUMINIUM BRONZE CC333G

### MAXIMUM CONDITIONS OF USE :

- 20 bar of -10°C to 250°C

### APPLICATIONS :

- Water-based fluids
- Steam (8 bar)
- Seawater

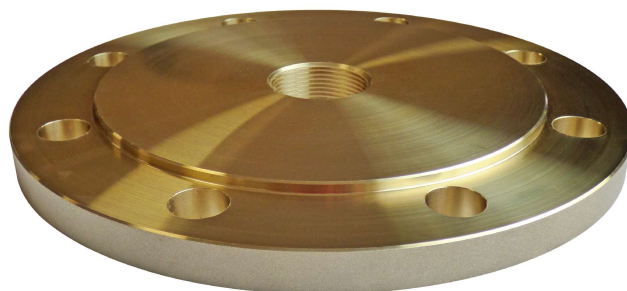

*Subject to modifications*

| NOMENCLATURE |     |             |                  |
|--------------|-----|-------------|------------------|
| Rep          | Qty | Designation | Material         |
| 54           | 1   | FLANGE      | ALUMINIUM BRONZE |

| DIMENSIONS  |        |
|-------------|--------|
| DN          | 150/15 |
| A (mm)      | 23     |
| B (mm)      | 211    |
| C           | 1/2"   |
| D (mm)      | 285    |
| E (mm)      | 18     |
| F (mm)      | 22     |
| G (mm)      | 240    |
| Weight (Kg) | 11.390 |


### REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Flange : NF EN 1092-3

Ref. instruction of assembling :

Ref. instruction of operation :

**Mounting & assembly guides are available  
on our website.**

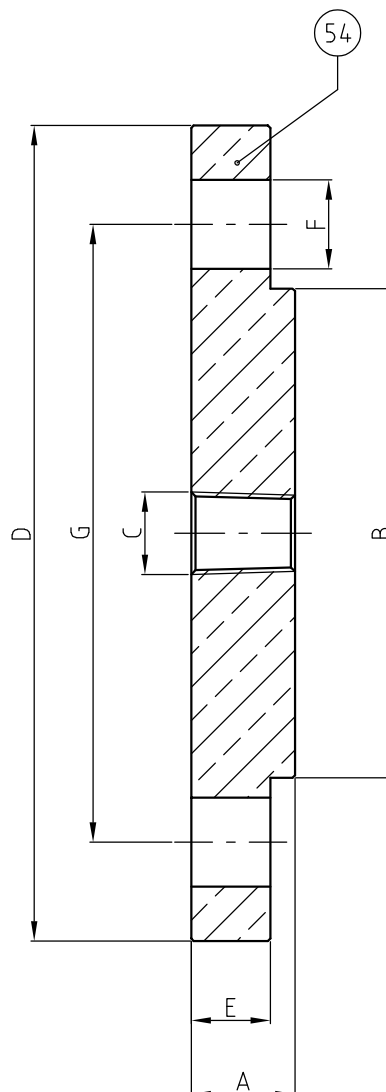

*These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.*