



AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

Ref. UA32 Family : 42

Rev. 03

Date : 17 Sept. 2025

Page 1/1

ALUMINIUM BRONZE MALE THREADED BARREL NIPPLE Ref. UA32

SERIES :

- UA32

For material compatibility, contact us

CARACTERISTICS :

- PN16 (Nominal Pressure)
- ENDS : BSPT Male threads
- MATERIAL : ALUMINIUM BRONZE CW307G




MAXIMUM CONDITIONS OF USE :

- 16 bar of -10°C to 200°C

Subject to modifications

APPLICATIONS :

- Water-based fluids
- Water
- Seawater

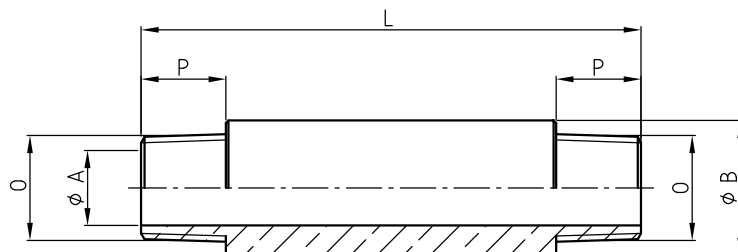

DIMENSIONS							
Reference	DN	ØA (mm)	ØB (mm)	L (mm)	O	P (mm)	Weight (Kg)
UA32.06100	6	6	15	100	R 1/8	9	0.098
UA32.0860	8	8	18.5	60	R 1/4	12.5	0.100
UA32.0880	8	8	18.5	80	R 1/4	12.5	0.107
UA32.08100	8	8	18.5	100	R 1/4	12.5	0.140
UA32.08150	8	8	18.5	150	R 1/4	12.5	0.223
UA32.08200	8	8	18.5	200	R 1/4	12.5	0.306
UA32.10100	10 (12)	10	22	100	R 3/8	13	0.196
UA32.1280	10 (12)	10	22	80	R 3/8	13	0.151
UA32.12100	10 (12)	10	22	100	R 3/8	13	0.196
UA32.12150	10 (12)	10	22	150	R 3/8	13	0.311
UA32.15100	15	15	22	100	R 1/2	17	0.241
UA32.1560	15	15	22	60	R 1/2	17	0.180
UA32.2080	20	20	32.5	80	R 3/4	18.5	0.233
UA32.20100	20	20	32.5	100	R 3/4	18.5	0.312
UA32.20250	20	20	32.5	250	R 3/4	18.5	0.900
UA32.25100	25	25	39.5	100	R 1	21	0.442
UA32.32100	32	32	49	100	R 1 1/4	23.5	0.637
UA32.40100	40	40	56	100	R 1 1/2	23.5	0.673
UA32.50100	50	50	68	100	R 2	28	0.901

REFERENCES NORMS :

- Material : NF EN 1982-NF EN 12163-NF EN 12164-NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Threads : ISO 7-1

Ref. instruction of assembling :

Ref. instruction of operation :

**Mounting & assembly guides are available
on our website.**

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.