



AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

Ref. AU3298 Family : 46

Rev. 03

Date : 30 Oct. 2025

Page 1/1

ALUMINIUM BRONZE FIRE HYDRANT BIB-NOSE 45° VALVE

Ref. AU3298.Ø

SERIES :

- AU3298.Ø

For material compatibility, contact us

CARACTERISTICS :

- PN16 (Nominal Pressure)
- ENDS : Flange ISO PN16 / Guillemain outlet coupling
- MATERIAL : ALUMINIUM BRONZE CC333G

MAXIMUM CONDITIONS OF USE :

- 16 bar of -10°C to 100°C

APPLICATIONS :

- Fire networks
- Seawater

OPTIONS :


- Special drilling

Specific dimensions, contact us



*Subject to modifications
Photo for information only*

NOMENCLATURE			
Rep	Qty	Designation	Material
1	1	BODY	ALUMINIUM BRONZE
2	1	BONNET	ALUMINIUM BRONZE
4	1	DISC	NBR
5	1	DISC HOLDER	ALUMINIUM BRONZE
7	1	STEM	ALUMINIUM BRONZE
8	1	HANDWHEEL	EPOXY COATED ZAMAK
37	1	PLUG	ALUMINIUM BRONZE
40a	1	NUT	STAINLESS STEEL A4
40b	1	NUT	STAINLESS STEEL A4
41	2	WASHER	ALUMINIUM BRONZE
45a	1	GASKET	FPM
45b	1	GASKET	FPM
45c	1	GASKET	NBR
68	1	CHAIN	STAINLESS STEEL A4
69	1	FITTING	ALUMINIUM BRONZE

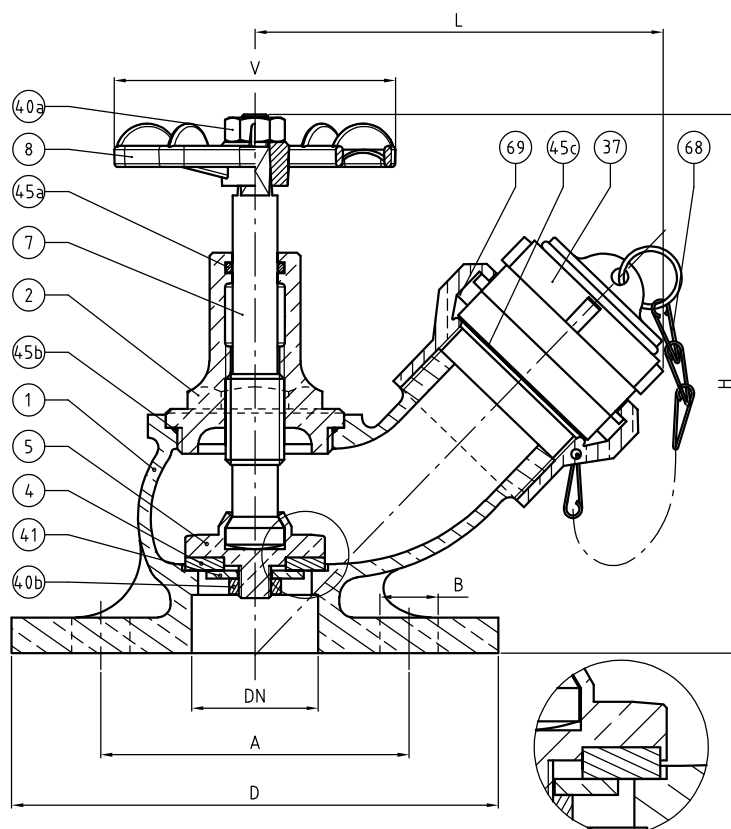

REFERENCES NORMS :


- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Flange : NF EN 1092-3

Ref. instruction of assembling : 0904DA119E

Ref. instruction of operation : 0904DA120E

**Mounting & assembly guides are available
on our website.**

**We recommend installing the tap with the head facing
upwards or horizontally, as shown in the diagrams below**

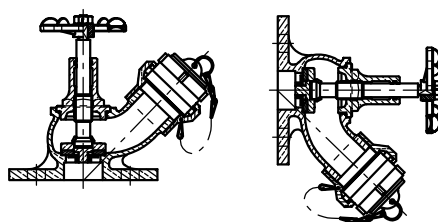

DIMENSIONS	
DN	40
A (mm)	110
B (mm)	18
D (mm)	150
H (mm)	176
L (mm)	118
V (mm)	90
Weight (Kg)	2.890

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.