AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

Ref. AU601 Family : 47

Rev. 03

Date : 03 Nov. 2026

Page 1/4

ALUMINIUM BRONZE BUTTERFLY VALVE Ref. AU601MEØ

SERIES :
- AU601

For material compatibility, contact us

CE



Subject to modifications


CARACTERISTICS :
- PN16 (Nominal Pressure)
- JUNCTION : ISO PN10/PN16 & ISO PN20 (ANSICl 150)
- MATERIAL : ALUMINIUM BRONZE CC333G

MAXIMUM CONDITIONS OF USE :
- 16 bar of -10°C to 100°C

APPLICATIONS :
- Water-based fluids
- Water
- Seawater

OPTIONS :
- EPDM, FPM or NBR Cuff

Specific dimensions, contact us

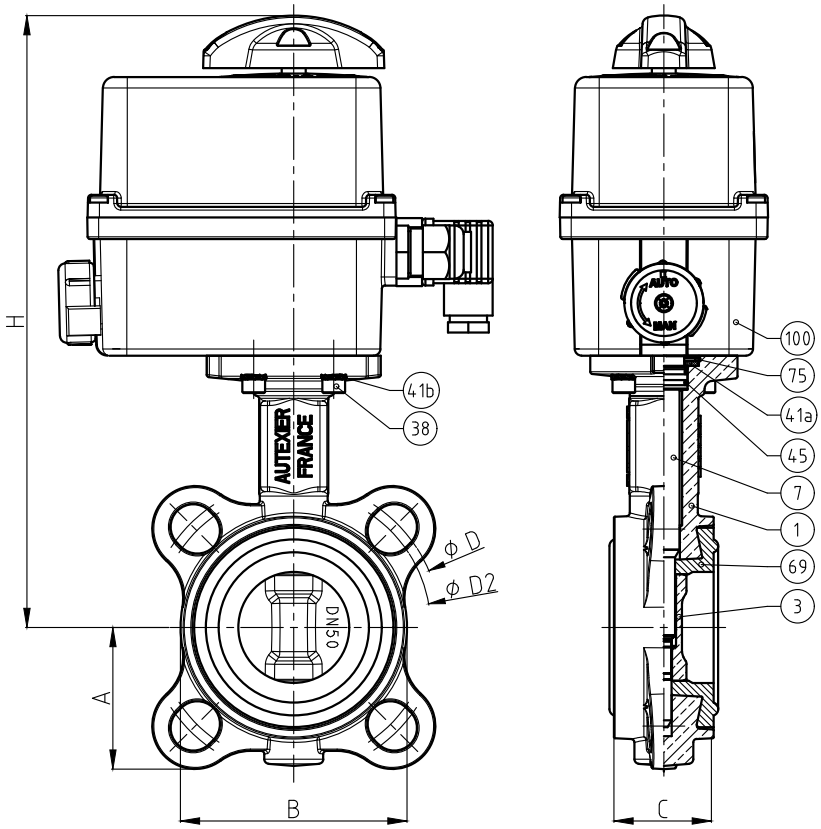

NOMENCLATURE			
Rep	Qty	Designation	Material
1	1	BODY	ALUMINIUM BRONZE
3	1	WEDGE DISC	ALUMINIUM BRONZE
7	1	STEM	ALUMINIUM BRONZE
38	4	SCREW	STAINLESS STEEL (2)
41a	1	WASHER	ALUMINIUM BRONZE
41b	4	WASHER	STAINLESS STEEL A4
45	2	O-RING	FPM
69	1	CUFF	EPDM / FPM / NBR
75	1	HOUSING RINGS	STAINLESS STEEL A4
100	1	ACTUATOR	PA6 UL 94 V-0 STAINLESS STEEL

REFERENCES NORMS :
- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Face-to-face : NF EN 558 - Series 20
- Shell design strengh : NF EN 12516-3 V2003
- Stainless steel fasteners : (1) NF EN ISO 3506-1/-2 (A4-70) or NF EN 10269 (1.4404 or 1.4401) / (2) STAINLESS STEEL A4-70 or its equivalent

Ref. instruction of assembling : 0904DA113E
Ref. instruction of operation : 0904DA114E
Mounting & assembly guides are available on our website.

DIMENSIONS				
DN	32	40	50	65
A (mm)	54	58	62	72
B (mm)	73	80	100	112
C (mm)	33	33	43	46
D (mm)	100	110	125	145
D2 (mm)	88.9	98.4	120.6	139.7
H (mm)	258	260	270	310
Base ISO	F05	F05	F05	F05
Maximum torque (N.m)	12	15	17	25
Weight (Kg)	2.650	2.750	--	4.950

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment choosen and the real conditions of use.

AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

ALUMINIUM BRONZE BUTTERFLY VALVE Ref. AU601MEØ

SERIES :
- AU601

For material compatibility, contact us

CARACTERISTICS :
- PN16 (Nominal Pressure)
- JUNCTION : ISO PN10/PN16 & ISO PN20 (ANSICL 150)
- MATERIAL : ALUMINIUM BRONZE CC333G




Subject to modifications

MAXIMUM CONDITIONS OF USE :
- 16 bar of -10°C to 100°C

APPLICATIONS :
- Water-based fluids
- Water
- Seawater

OPTIONS :
- EPDM, FPM or NBR Cuff

Specific dimensions, contact us

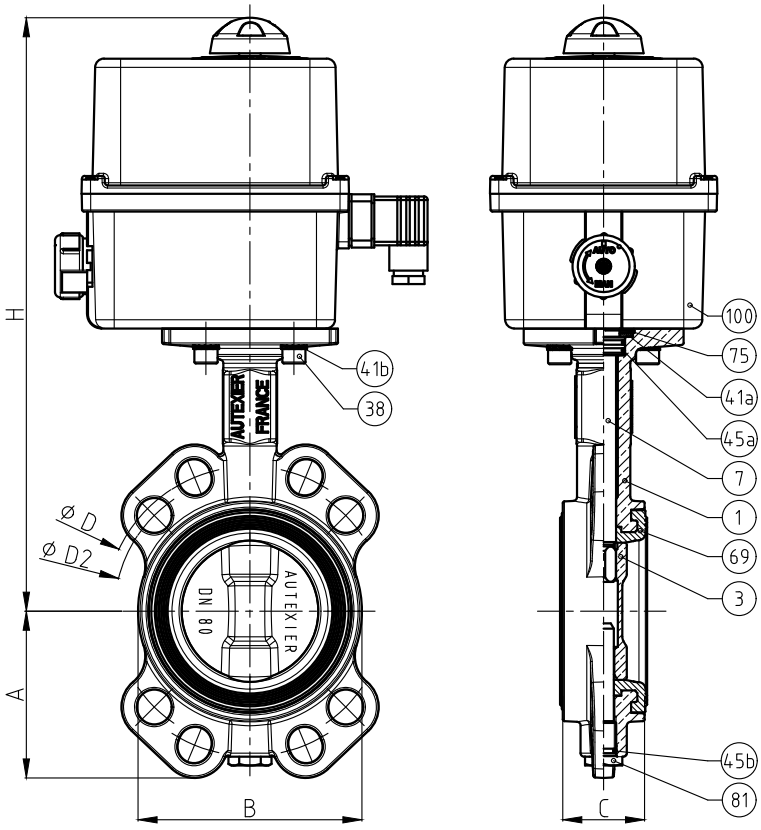

NOMENCLATURE			
Rep	Qty	Designation	Material
1	1	BODY	ALUMINIUM BRONZE
3	1	WEDGE DISC	ALUMINIUM BRONZE
7	1	STEM	ALUMINIUM BRONZE
38	4	SCREW	STAINLESS STEEL (2)
41a	1	WASHER	ALUMINIUM BRONZE
41b	4	WASHER	STAINLESS STEEL A4
45a	3	O-RING	FPM
45b	3	O-RING	FPM
69	1	CUFF	EPDM / FPM / NBR
75	1	HOUSING RINGS	STAINLESS STEEL A4
81	1	AXIS	ALUMINIUM BRONZE
100	1	ACTUATOR	PA6 UL 94 V-0 STAINLESS STEEL

REFERENCES NORMS :
- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Face-to-face : NF EN 558 - Series 20
- Shell design strengh : NF EN 12516-3 V2003
- Stainless steel fasteners : (1) NF EN ISO 3506-1/-2 (A4-70) or NF EN 10269 (1.4404 or 1.4401) / (2) STAINLESS STEEL A4-70 or its equivalent

DIMENSIONS	
DN	80
A (mm)	94
B (mm)	126
C (mm)	46
D (mm)	160
D2 (mm)	152.4
H (mm)	334
Base ISO	F07
Maximum torque (N.m)	28
Weight (Kg)	--

Ref. instruction of assembling : 0904DA113E
Ref. instruction of operation : 0904DA114E
Mounting & assembly guides are available on our website.

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment choosen and the real conditions of use.

AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

ALUMINIUM BRONZE BUTTERFLY VALVE Ref. AU601MEØ

SERIES :
- AU601

For material compatibility, contact us

CE



Subject to modifications


CARACTERISTICS :
- PN16 (Nominal Pressure)
- JUNCTION : ISO PN10/PN16 & ISO PN20 (ANSICL 150)
- MATERIAL : ALUMINIUM BRONZE CC333G

MAXIMUM CONDITIONS OF USE :
- 16 bar of -10°C to 100°C

APPLICATIONS :
- Water-based fluids
- Water
- Seawater

OPTIONS :
- EPDM, FPM or NBR Cuff

Specific dimensions, contact us

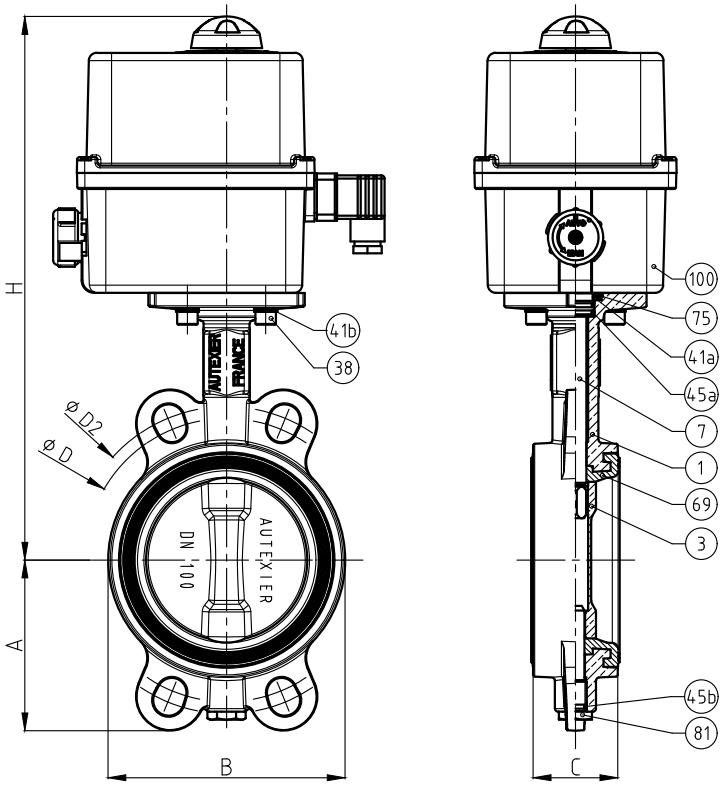

NOMENCLATURE			
Rep	Qty	Designation	Material
1	1	BODY	ALUMINIUM BRONZE
3	1	WEDGE DISC	ALUMINIUM BRONZE
7	1	STEM	ALUMINIUM BRONZE
38	4	SCREW	STAINLESS STEEL (2)
41a	1	WASHER	ALUMINIUM BRONZE
41b	4	WASHER	STAINLESS STEEL A4
45a	3	O-RING	FPM
45b	3	O-RING	FPM
69	1	CUFF	EPDM / FPM / NBR
75	1	HOUSING RINGS	STAINLESS STEEL A4
81	1	AXIS	ALUMINIUM BRONZE
100	1	ACTUATOR	PA6 UL 94 V-0 STAINLESS STEEL

REFERENCES NORMS :
- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Face-to-face : NF EN 558 - Series 20
- Shell design strengh : NF EN 12516-3 V2003
- Stainless steel fasteners : (1) NF EN ISO 3506-1/-2 (A4-70) or NF EN 10269 (1.4404 or 1.4401) / (2) STAINLESS STEEL A4-70 or its equivalent

DIMENSIONS	
DN	100
A (mm)	108
B (mm)	150
C (mm)	52
D (mm)	180
D2 (mm)	190.5
H (mm)	344
Base ISO	F07
Maximum torque (N.m)	50
Weight (Kg)	6.450

Ref. instruction of assembling : 0904DA113E
Ref. instruction of operation : 0904DA114E
Mounting & assembly guides are available on our website.

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment choosen and the real conditions of use.

AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

ALUMINIUM BRONZE BUTTERFLY VALVE Ref. AU601MEØ

SERIES :
- AU601

For material compatibility, contact us

CE



Subject to modifications


CARACTERISTICS :
- PN16 / PN10 (Nominal Pressure)
- JUNCTION : ISO PN10/PN16 & ISO PN20 (ANSI CL 150)
- MATERIAL : ALUMINIUM BRONZE CC333G

MAXIMUM CONDITIONS OF USE :
- 16 bar of -10°C to 100°C
- 10 bar of -10°C to 100°C (DN200 & DN250)

APPLICATIONS :
- Water-based fluids
- Water
- Seawater

OPTIONS :
- EPDM, FPM or NBR Cuff

Specific dimensions, contact us

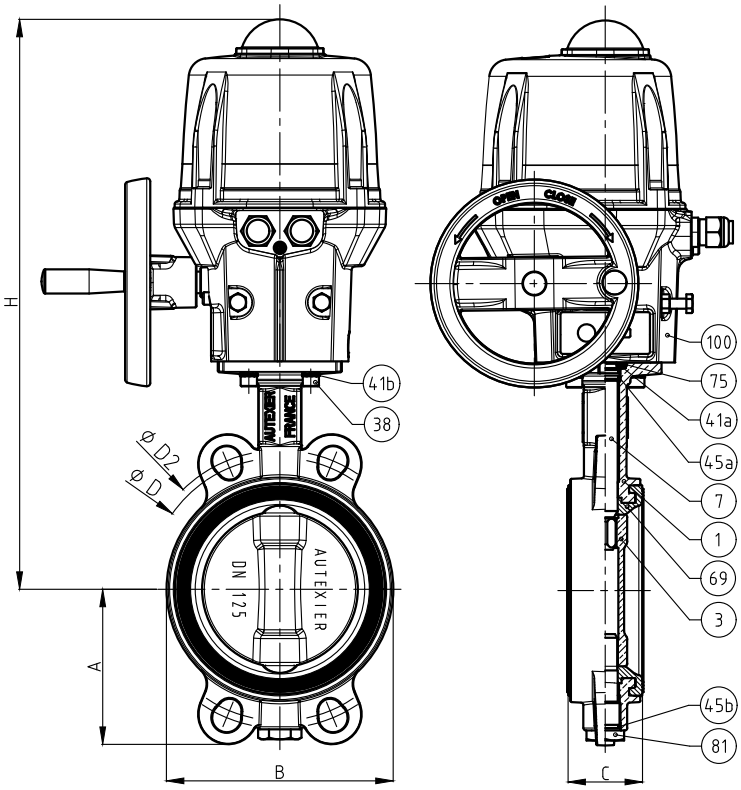

NOMENCLATURE			
Rep	Qty	Designation	Material
1	1	BODY	ALUMINIUM BRONZE
3	1	WEDGE DISC	ALUMINIUM BRONZE
7	1	STEM	ALUMINIUM BRONZE
38	4	SCREW	STAINLESS STEEL (2)
41a	1	WASHER	ALUMINIUM BRONZE
41b	4	WASHER	STAINLESS STEEL A4
45a	3	O-RING	FPM
45b	3	O-RING	FPM
69	1	CUFF	EPDM / FPM / NBR
75	1	HOUSING RINGS	STAINLESS STEEL A4
81	1	AXIS	ALUMINIUM BRONZE
100	1	ACTUATOR	ALUMINUM + EPOXY PAINT PA6 UL 94 V-0 STEEL + Zn / STAINLESS STEEL

REFERENCES NORMS :
- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Face-to-face : NF EN 558 - Series 20
- Shell design strengh : NF EN 12516-3 V2003
- Stainless steel fasteners : (1) NF EN ISO 3506-1/-2 (A4-70) or NF EN 10269 (1.4404 or 1.4401) / (2) STAINLESS STEEL A4-70 or its equivalent

DIMENSIONS				
DN	125	150	200	250
A (mm)	124	134	170	206
B (mm)	181	209	257	330
C (mm)	56	56	60	68
D (mm)	210	240	295	355
D2 (mm)	215.9	241.3	298.4	362
H (mm)	455	467	503	562
Base ISO	F07	F07	F07	F10
Maximum torque (N.m)	85	110	140	270
Weight (Kg)	12.500	--	--	--

Ref. instruction of assembling : 0904DA113E
Ref. instruction of operation : 0904DA114E
Mounting & assembly guides are available on our website.

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment choosen and the real conditions of use.