



AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

Ref. 251 Family : 00

Rev. 03

Date : 09 Dec. 2021

Page 1/1


BRONZE REVERSED CONICAL PLUG VALVE

Ref. 251.Ø.Ø

SERIES :

- 251
- Bronze / Bronze contact
- 1 inlet / 2 outlets

For material compatibility, contact us

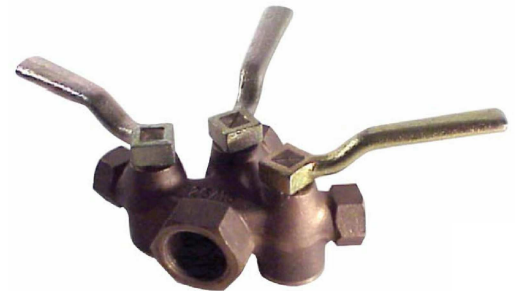

Subject to modifications

CHARACTERISTICS :

- PN06 (Nominal Pressure)
- ENDS : BSP female threads
- MATERIAL : BRONZE CC491K

MAXIMUM CONDITIONS OF USE :

- 6 bar of -45°C to 225°C



APPLICATIONS :

- Compressed air
- Non-toxic gases

OPTIONS :

- NPT / API connection

Specific dimensions, contact us

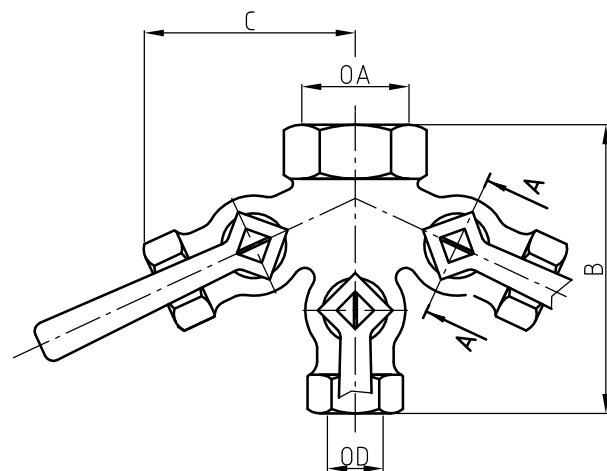

NOMENCLATURE			
Rep	Qty	Designation	Material
1	1	BODY	BRONZE
16	3	ROTARY	BRONZE
19	3	HANDLE	CAST IRON
23	3	SPRING	STAINLESS STEEL
37	3	PLUG	BRONZE

REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)

Ref. instruction of assembling : 0904DA127E

Ref. instruction of operation : 0904DA128E

Mounting & assembly guides are available on our website.

DIMENSIONS				
DN	20.12	26.15	33.20	40.26
B (mm)	80	98	108	126
C (mm)	55	72	83	96
OA	G 3/4"	G 1"	G 1 1/4"	G 1 1/2"
OD	G 3/8"	G 1/2"	G 3/4"	G 1"
Weight (Kg)	0.940	1.617	2.200	3.320

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.