



AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

Ref. AU189 Family : 27

Rev. 03

Date : 30 Jan. 2026

Page 1/1

ALUMINIUM BRONZE SAFETY VALVE

Ref. AU189.0/AU189.0BP/AU189T0

SERIES :

- AU189 : FPM disc
- AU189BP : VMQ disc (low pressure)
- AU189T : PTFE disc
- Male inlet / female outlet

For material compatibility, contact us

CHARACTERISTICS :

- PN40 (Nominal Pressure)
- ENDS : BSP Threads
- MATERIAL : ALUMINIUM BRONZE CC333G

MAXIMUM CONDITIONS OF USE :

- Ref. AU189 : 40 bar of -10°C to 200°C
- Ref. AU189BP: 40 bar of -10°C to 220°C
- Ref. AU189T : 40 bar of -10°C to 225°C

APPLICATIONS :

- Hot water & Industrial fluids
- Water-based fluids
- Steam up to 8 bar (FPM)
- Steam 8 to 15 bar (PTFE)
- Neutral gases (compressed air,...)

OPTIONS :


- Flange connection
- NPT connection
- Degreased disc / seat

Specific dimensions, contact us



Subject to modifications

DIMENSIONS				
DN	15	20	25	32
A (mm)	74	85	100	122
B (mm)	12	14	16	18
C (mm)	30	35	40	45
D	G 1/2"	G 3/4"	G 1"	G 1 1/4"
E (mm)	28	35	39	43
O	G 1/2"	G 3/4"	G 1"	G 1 1/4"
Weight (Kg)	0.290	0.485	0.800	1.210
S Inlet (mm²)	103.8	226.9	490.6	706.9
S Outlet (mm²)	272.6	456.8	720.6	1191.6

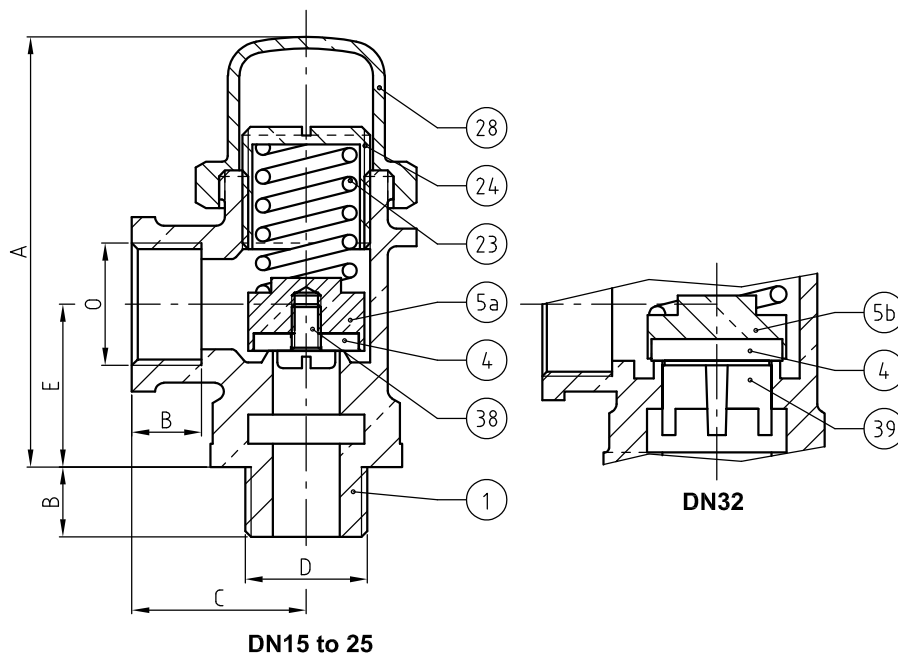

REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)
- Threads : ISO 228-1
- Stainless steel fasteners : NF EN 10269

Ref. instruction of assembling : 0904DA091E

Ref. instruction of operation : 0904DA153E

**Mounting & assembly guides are available
on our website.**

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.

NOMENCLATURE			
Rep	Qty	Designation	Material
1	1	BODY	ALUMINIUM BRONZE
4	1	DISC	FPM / VMQ / PTFE
5a	1	DISC HOLDER (DN15 to DN25)	ALUMINIUM BRONZE
5b	1	DISC HOLDER (DN32)	ALUMINIUM BRONZE
23	1	SPRING	STAINLESS STEEL 302
24	1	ADJUSTING SCREW	ALUMINIUM BRONZE
28	1	CAP	ALUMINIUM BRONZE
38	1	SCREW (DN15 to DN25)	STAINLESS STEEL A4-70
39	1	FIN (DN32)	ALUMINIUM BRONZE