



# AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE  
Phone: +33 (0)3 23 52 02 86 Fax: +33 (0)3 23 39 52 28  
Website: www.autexier.fr

Ref. AU115 Family: 15

Rev. 01

Date: 23 Dec. 2016

Page 1/1

## ALUMINIUM BRONZE CHECK VALVE Ref. AU115.12

### SERIES :

- AU115

*For material compatibility, contact us*

### CHARACTERISTICS :

- PN450 (Nominal Pressure)
- ENDS : Female GAZ threads
- MATERIAL : ALUMINIUM BRONZE CC332G

### MAXIMUM CONDITIONS OF USE :

- 250 bar of -20°C to 120°C (pneumatic)
- 450 bar of -20°C to 120°C (hydraulic)
- Opening pressure: 0,4 et 4,5 bar

### APPLICATIONS :

- Air
- Water-based fluids


### OPTIONS :

- NPT/API connection
- Specific dimensions, contact us*



*Subject to modifications*

NOMENCLATURE			
Rep	Qty	Designation	Material
1	1	BODY	ALUMINIUM BRONZE
5	1	DISC HOLDER	ALUMINIUM BRONZE
23	1	SPRING	STAINLESS STEEL
41	1	WASHER	ALUMINIUM BRONZE
45	1	O-RING	FPM
75	1	HOUSING RINGS	STAINLESS STEEL

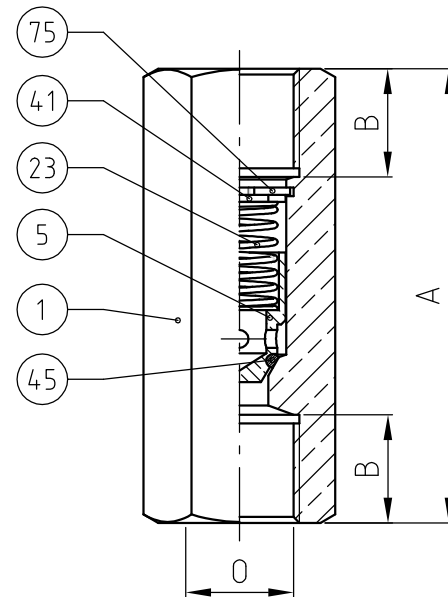

### REFERENCES NORMS :

- Material: NF EN 1982 - NF EN 12164 - NF EN 10272
- Testing & checking: NF EN 12266-1/-2 (bench test)

Ref. instruction of assembling:

Ref. instruction of operation:

**Mounting & assembly guides are available on our website.**

DIMENSIONS	
DN	12
A (mm)	63
B (mm)	15
O	G 3/8

*These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.*