



AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
 Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
 Website : www.autexier.fr

Ref. 3184 Family : 22

Rev. 02

Date : 18 May 2021

Page 1/1

BRONZE VISUAL LEVEL CONTROLLER - INFERIOR PART

Ref. 3184PIØ

SERIES :

- 3184PIØ
- Male inlet
- With safety push button
- Tap drain valve
- FPM packing
- PI = Inferior Part

For material compatibility, contact us

CARACTERISTICS :

- PN10 (Nominal Pressure)
- ENDS : Ø15 Conical GAZ Threads / Ø20 GAZ Threads
- MATERIAL : BRONZE CC491K

MAXIMUM CONDITIONS OF USE :

- 10 bar of -15°C to 200°C

APPLICATIONS :

- Water-based fluids
- Oil & gas

OPTIONS :


- Tube length - 0,2 to 6 meters
- Intermediate connection (274)
- Pyrex® or rhodoïd tube
- Glass protection
- NPT connection
- Tightness packing special oil & gas

Specific dimensions, contact us



Subject to modifications

NOMENCLATURE			
Rep	Qty	Designation	Material
1	1	BODY	BRONZE
5	1	DISC HOLDER	BRASS
7	1	STEM	BRASS
10	1	STEM NUT	BRASS
12a	1	PACKING	PTFE
12b	1	PACKING	FPM
13	1	PACKING GLAND	BRASS
14	1	PACKING NUT	BRASS
19	1	HANDLE	BAKELITE
23	1	SPRING	STAINLESS STEEL
45	1	GASKET	FPM
52	1	BLEED COCK	BRASS

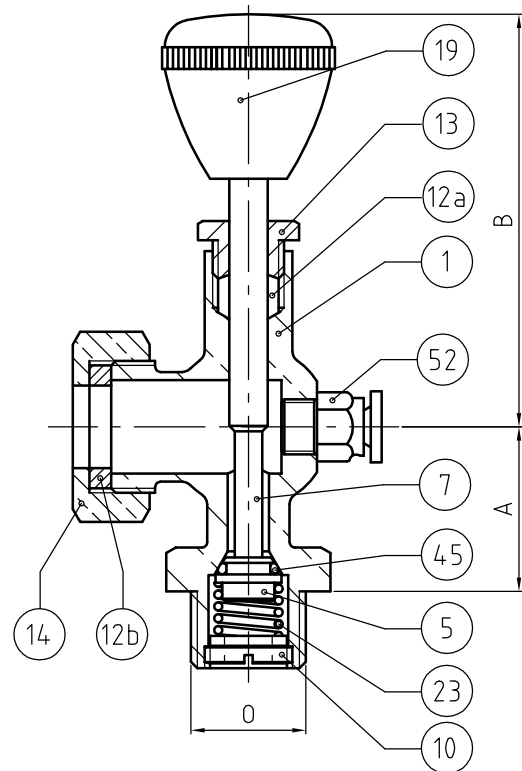

DIMENSIONS		
DN	15	20
A (mm)	30	30
B (mm)	75	80
O	R1/2	G3/4
Weight (Kg)	0.254	0.311

REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)

Ref. instruction of assembling : 0904DA140E

Ref. instruction of operation : 0904DA141E

Mounting & assembly guides are available on our website.

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.