



AUTEXIER

MANUFACTURER OF INDUSTRIAL VALVES

93 Rue Louis Blanc - 02300 CHAUNY - FRANCE
Phone : +33 (0)3 23 52 02 86 Fax : +33 (0)3 23 39 52 28
Website : www.autexier.fr

Ref. UA3260 Family : 42

Rev. 01

Date : 08 Jan. 2025

Page 1/1

ALUMINIUM BRONZE FEMALE / MALE REDUCER

Ref. UA3260.Ø

SERIES :

- UA3260


For material compatibility, contact us

CARACTERISTICS :

- PN40 (Nominal Pressure)
- ENDS : Female / Male BSP threaded
- MATERIAL : ALUMINIUM BRONZE CW307G

MAXIMUM CONDITIONS OF USE :


- 40 bar of -10°C to 200°C



Subject to modifications

APPLICATIONS :

- Water-based fluids
- Water
- Seawater

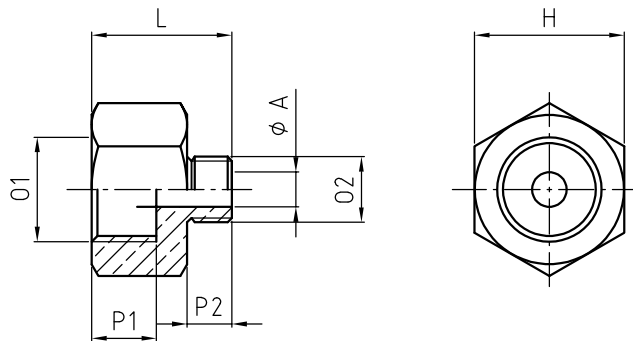

| DIMENSIONS | | | | | | | | | | |
|-------------|-----|-----|---------|--------|--------|-------|-------|---------|---------|-------------|
| Reference | DN1 | DN2 | ØA (mm) | H (mm) | L (mm) | O1 | O2 | P1 (mm) | P2 (mm) | Weight (Kg) |
| UA3260.1208 | 12 | 08 | 7 | 21 | 24 | G 3/8 | G 1/4 | 11 | 9 | 0.034 |
| UA3260.1508 | 15 | 08 | 7 | 30 | 28 | G 1/2 | G 1/4 | 13 | 9 | 0.089 |
| UA3260.1512 | 15 | 12 | 10 | 30 | 28 | G 1/2 | G 3/8 | 13 | 9 | 0.090 |
| UA3260.2008 | 20 | 08 | 7 | 36 | 34 | G 3/4 | G 1/4 | 18 | 9 | 0.155 |
| UA3260.2012 | 20 | 12 | 10 | 36 | 34 | G 3/4 | G 3/8 | 18 | 9 | 0.153 |
| UA3260.2015 | 20 | 15 | 15 | 30 | 39 | G 3/4 | G 1/2 | 18 | 14 | 0.093 |

REFERENCES NORMS :

- Material : NF EN 1982 - NF EN 12163 - NF EN 12164 - NF EN 10272
- Testing & checking : NF EN 12266-1/-2 (bench test)

Ref. instruction of assembling :

Ref. instruction of operation :

**Mounting & assembly guides are available
on our website.**

These data are for information and can be modified without notice. It is not up to us to appreciate specifications. It is up to the customer to verify the adequacy between the equipment chosen and the real conditions of use.